Attendance & Access Control Machine

Four types of access control verification methods |
SKD interface function | Capacity of 150,000 records

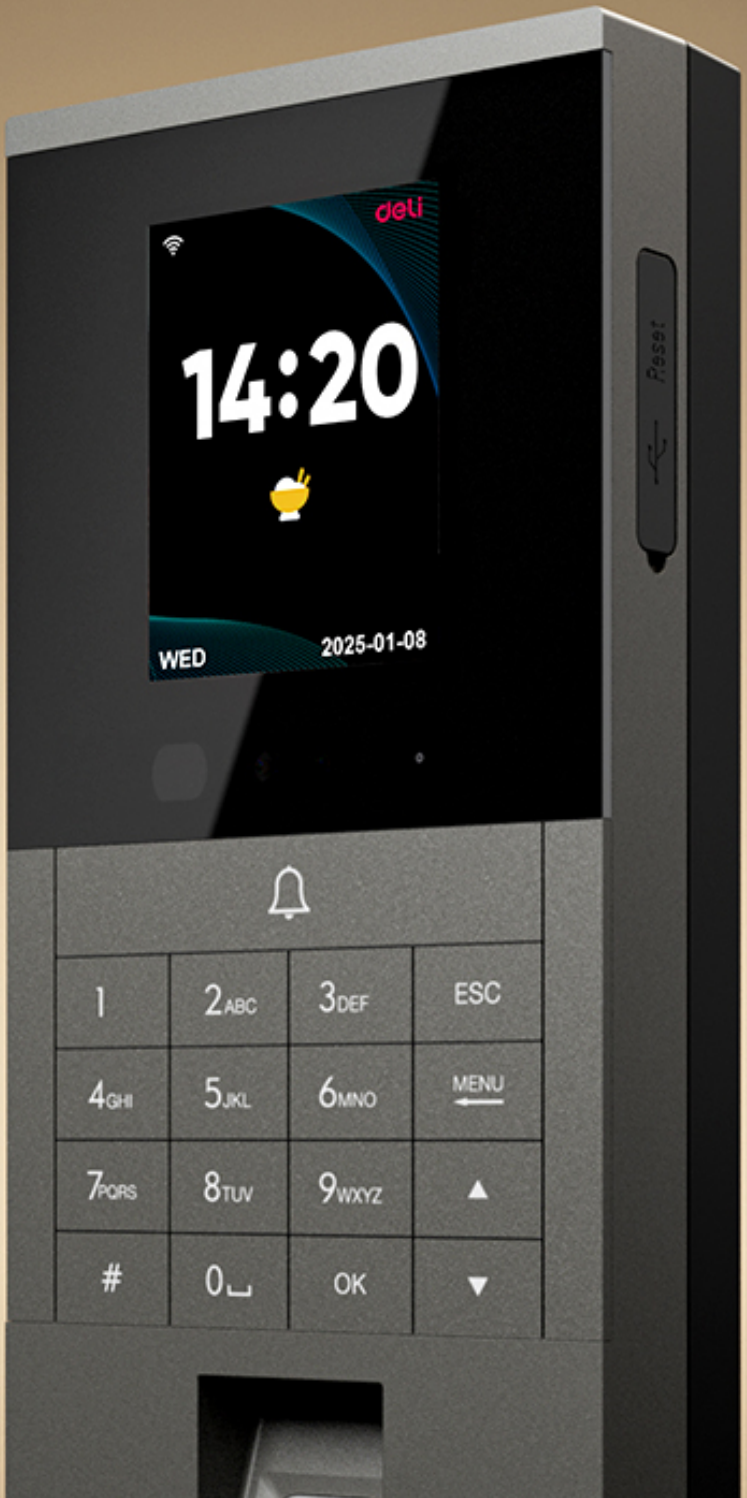
deli
14:20
WED
2025-01-08
Reset
1
2ABC
3DEF
ESC
4GHI
5JKL
6MNO
MENU
7PQRS
8TUV
9WXYZ
#
0
OK

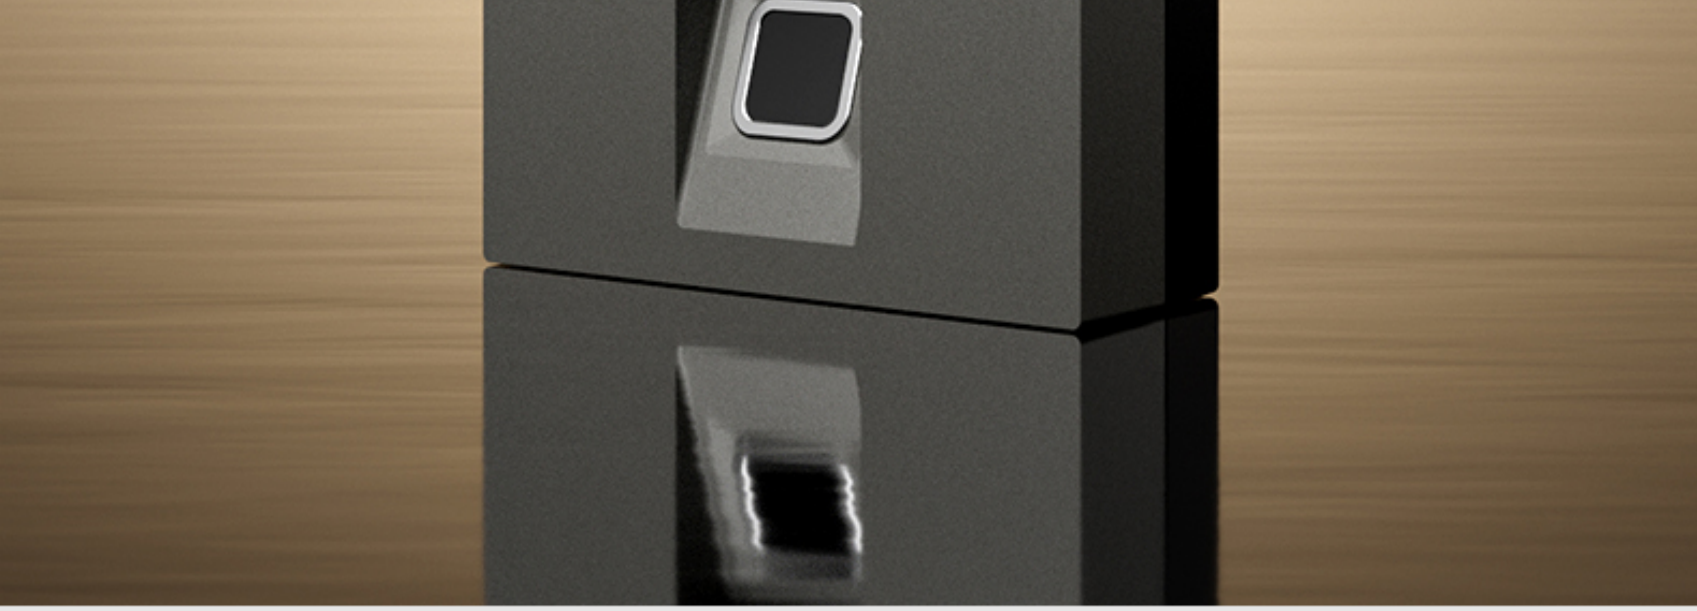

Visible light facial recognition

Non-film fingerprint recognition

8TUV
9WXYZ
0
OK

Facial verification

Fingerprint verification

Password verification

ID card verification

2.8-inch LCD display

deli
14:20
WED
2025-01-08

SDK interface function

1000 pieces
Facial capacity

1000 pieces
Fingerprint capacity

1000 items
Password capacity

1000 pieces
ID card capacity

150000 items
Record capacity

Two connection methods

TCP/IP connection

WiFi connection

Visible light dynamic face

Visible light dynamic face detection + infrared liveness detection effectively prevents attendance fraud through photos and videos

≤0.6 seconds

High-speed face recognition

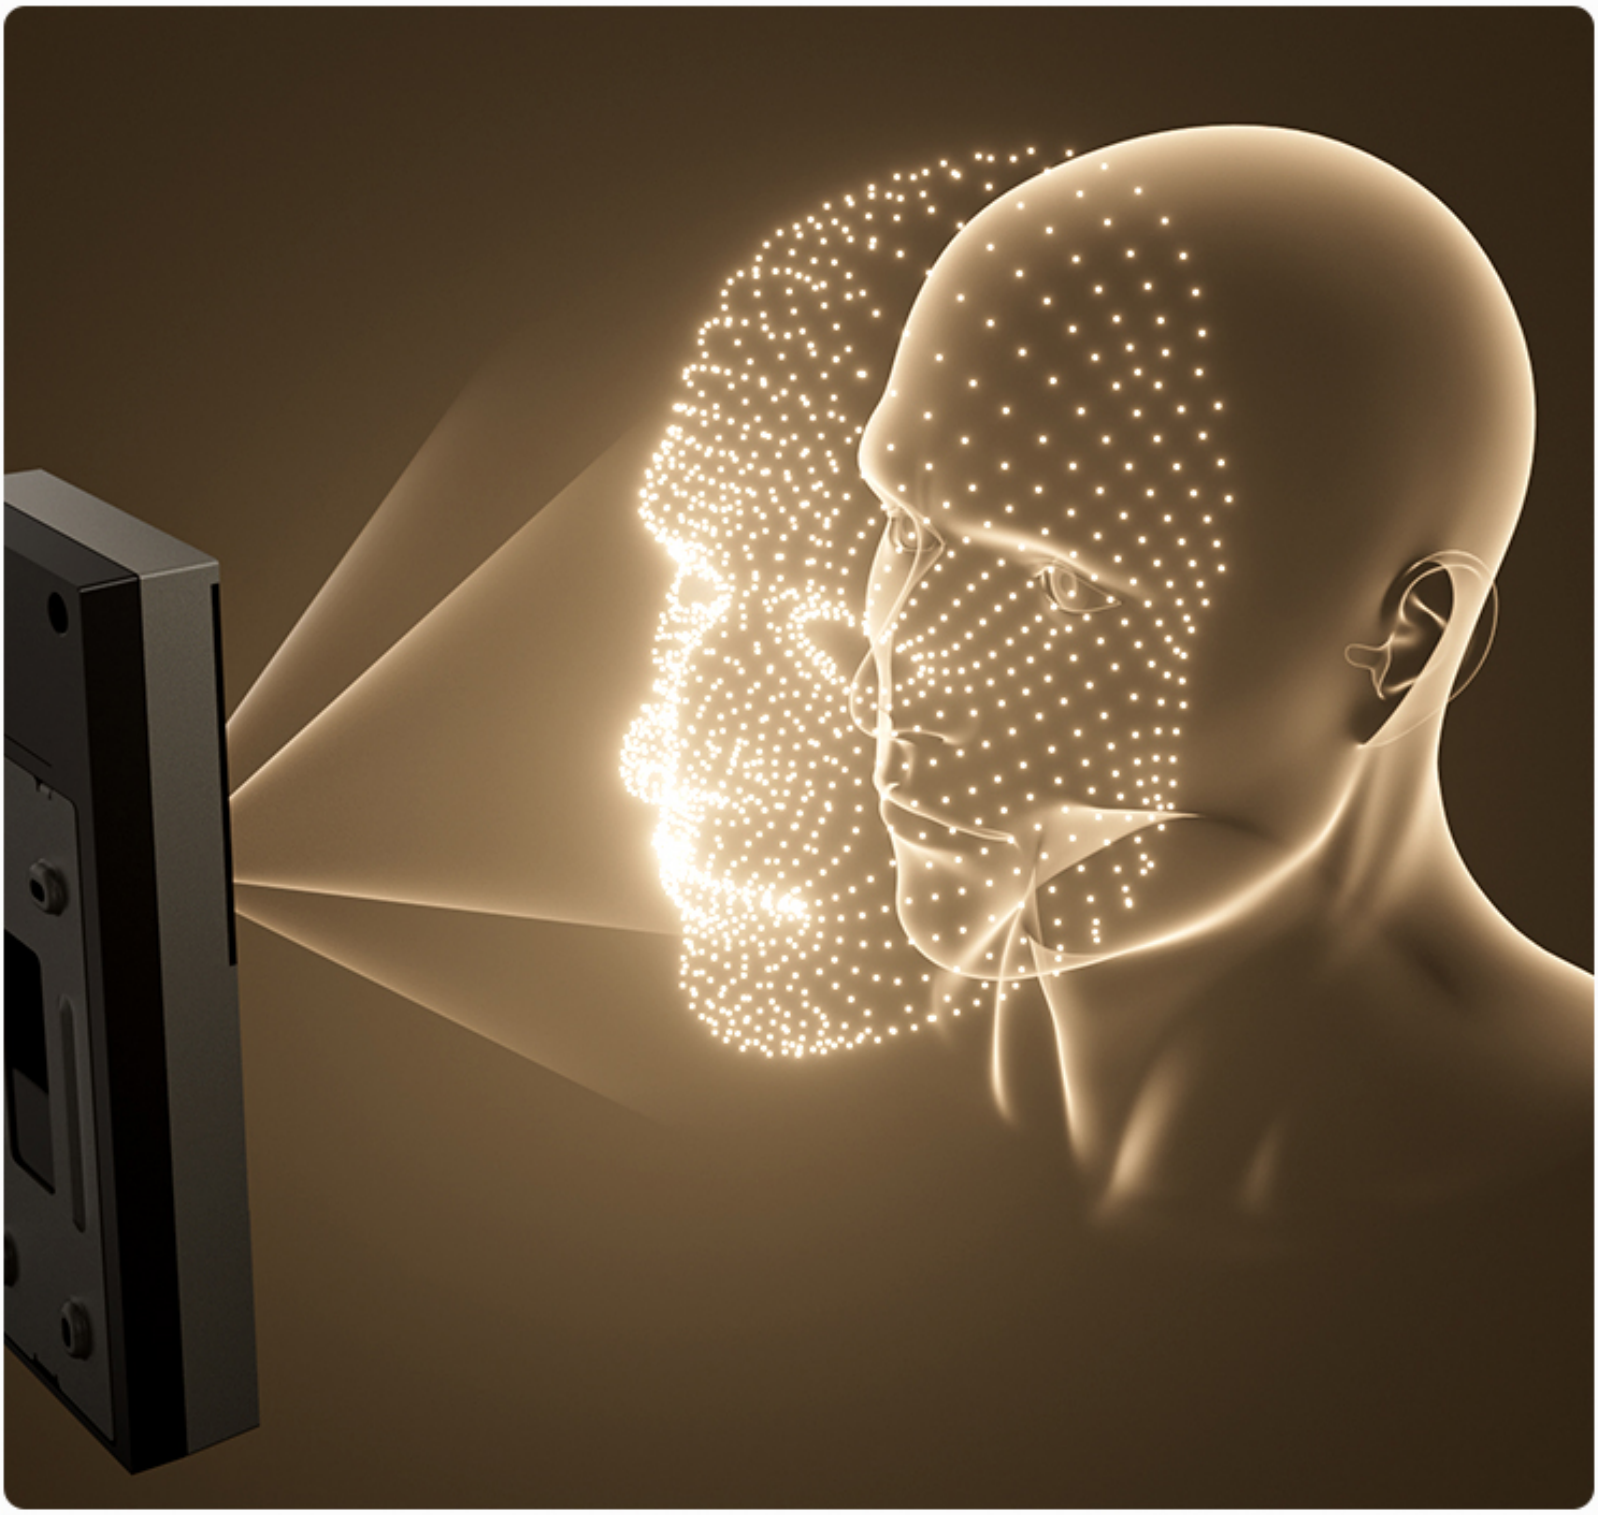

*The data is sourced from Deli Laboratory and may vary due to different working environments

BC
3DEF
ESC
JKL
6MNO
MENU
8TUV
9WXYZ
▲
▼
0
OK

Non-film optical fingerprint

≤1 second

Fingerprint recognition speed

99%

Accurate recognition with no omissions

One device is sufficient

1000 pieces
Facial capacity

1000 pieces
Fingerprint capacity

1000 items
Password capacity

1000 pieces
ID card capacity

150K items
Record capacity

Four types of verification methods

Supports four types of verification methods: face recognition, fingerprint, password, and ID card

Face recognition verification

Visible light
dynamic facial recognition

Fingerprint recognition verification

Filmless optical fingerprint
Sensitive feedback

Digital password verification

Touch digital keypad

IC card verification

Verify with one swipe of
IC card, carry it with you

2.8-inch LCD color screen

deli
14:20
WED
2025-01-08
Reset

1
2ABC
3DEF
4GHI
5JKL
6MNO
ESC
7PQRS
MENU

Three major peace of mind designs

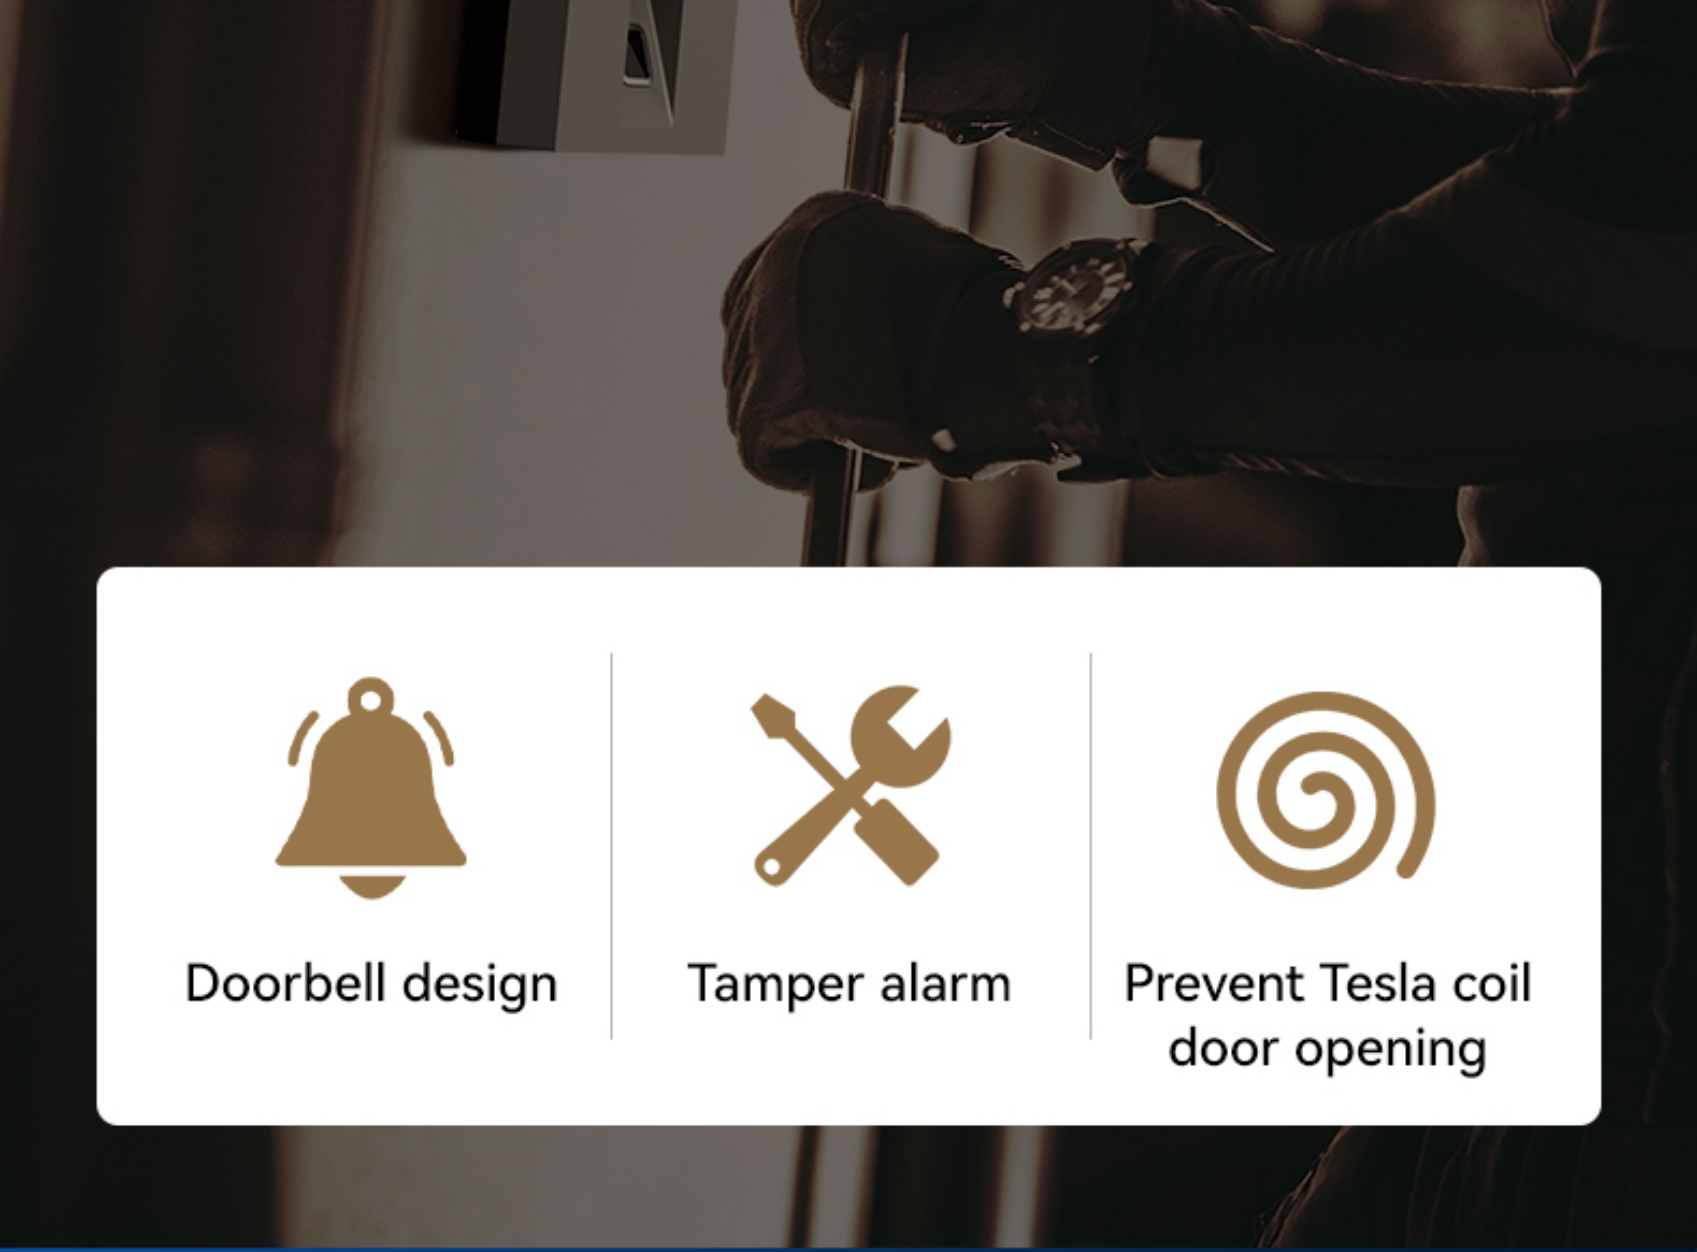

Doorbell design

Tamper alarm

Prevent Tesla coil door opening

Open SDK interface

Provide standardized development documents to make security management more efficient and intelligent, and make security adaptable to changing needs

Loading...
LOGIN

Product Data

The product dimensions are manually measured, so there may be slight errors

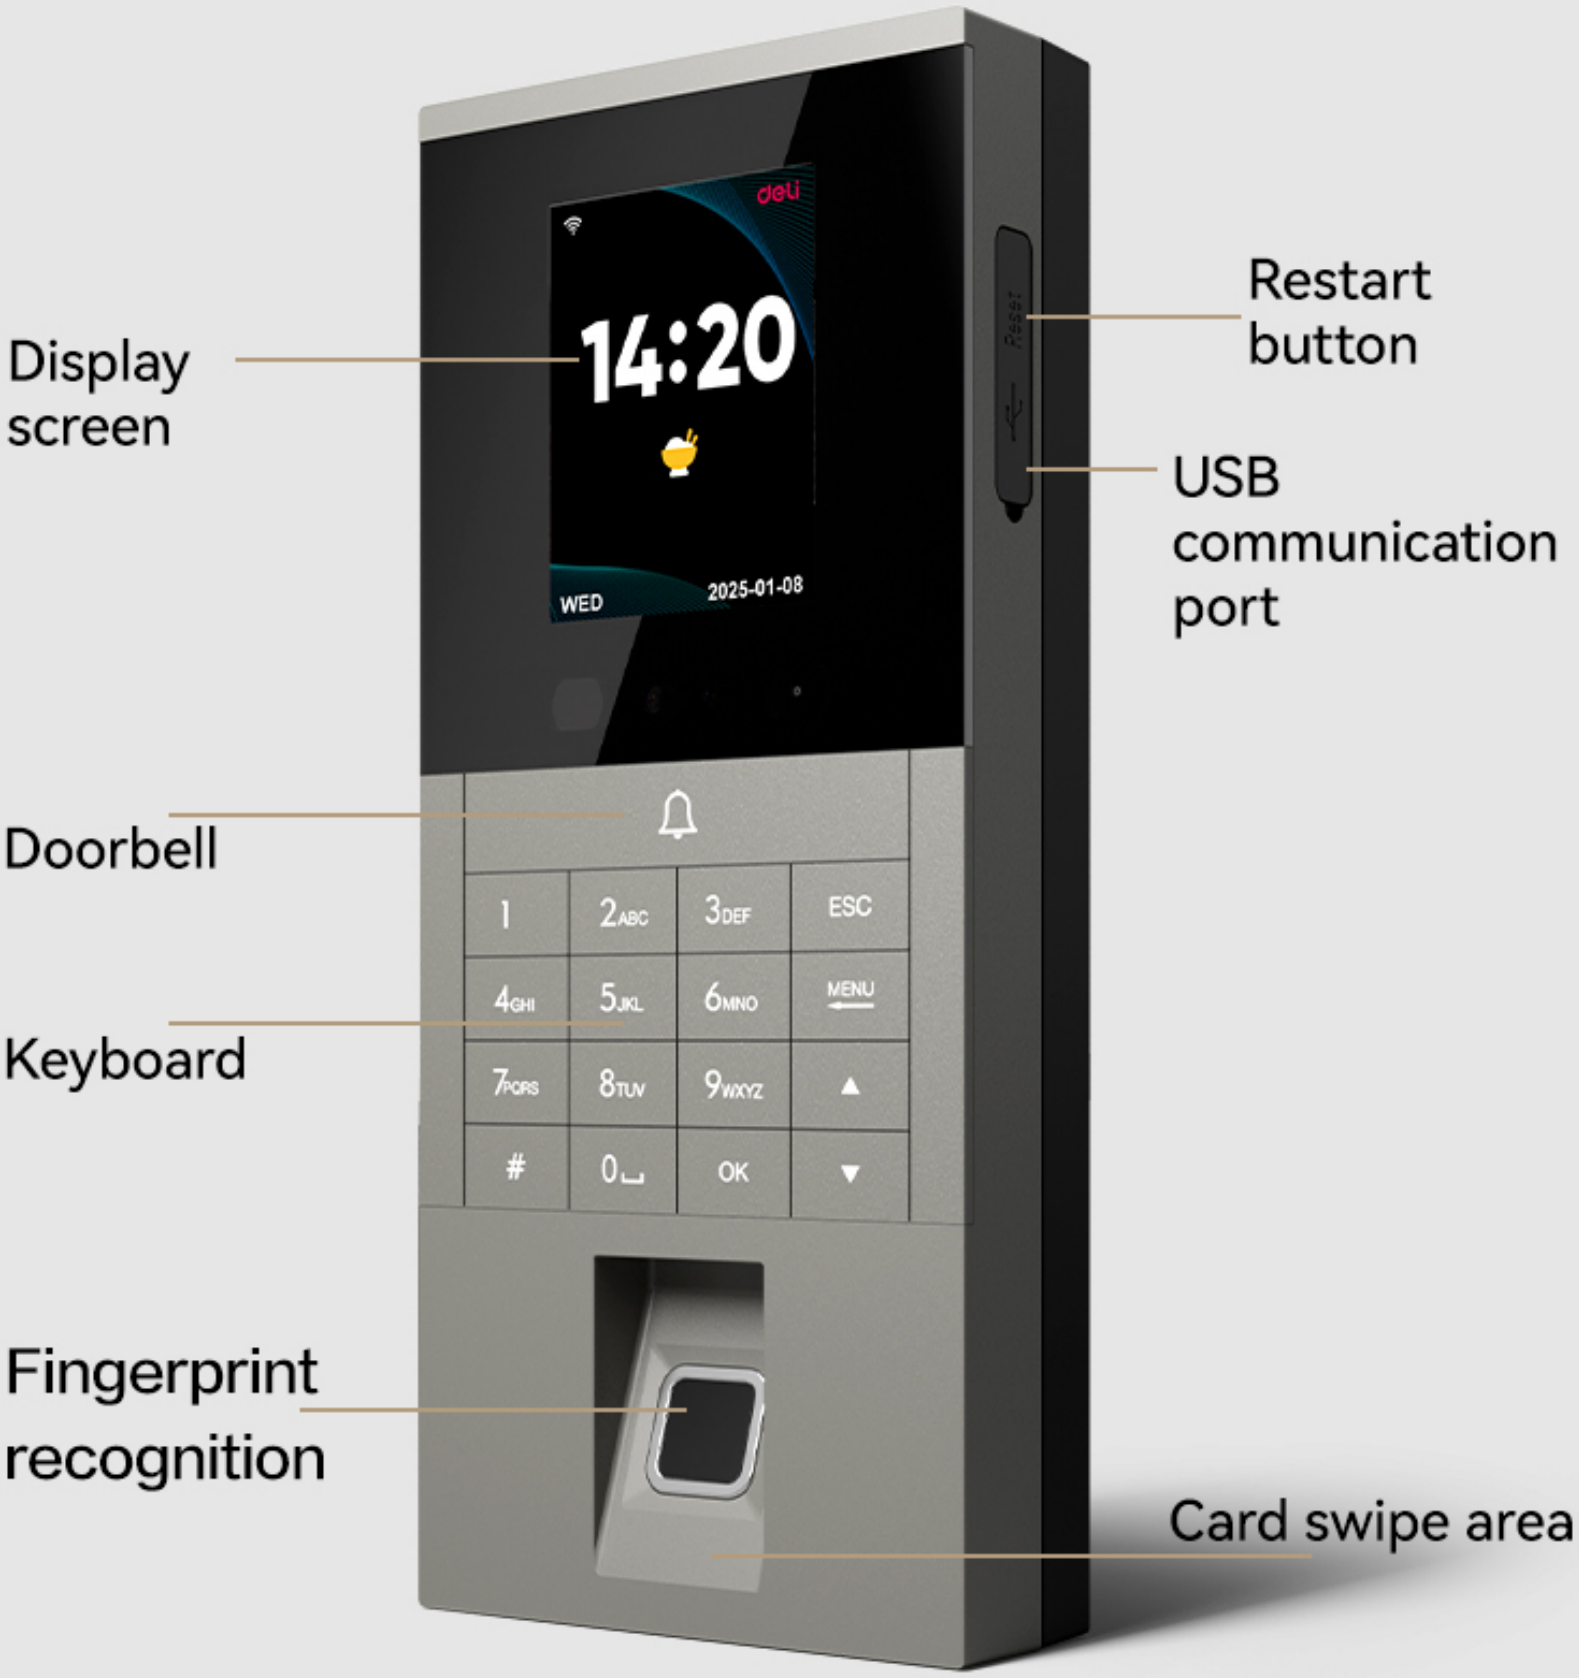
Display screen
Restart button
USB communication port
Doorbell
Keyboard
Fingerprint recognition
Card swipe area
deli
14:20
WED
2025-01-08
1
2ABC
3DEF
ESC
4GHI
5JKL
6MNO
MENU
7PQRS
8TUV
9WXYZ
#
0
OK

Name: Fingerprint & Face Access Control Machine

Ref.No.: ES602

Size: 210mm*90mm*32mm

Storage capacity: 150000 items

Facial capacity: 1000pieces

Fingerprint capacity: 1000pieces

Password capacity: 1000items

IC card capacity: 1000pieces

Operating temperature: 0℃-45℃

Operating humidity: 20%-80%

Power input: 12V ⎓2A

Connection method: TCP/IP WiFi

Network interface:
LOCK_NO、 LOCK_NC
COM (relay output) WG OUT_DO、WG OUT_D1
GND (Wiegand output) WG IN_DO、WG IN_D1
GND (Wiegand input) 、DBELL-DBELL+、
GND (doorbell interface)
EXIT、GND (door release button)
RJ451/2/3/6 (Wired Ethernet port interface) USB